



Brock's Performance Products • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

PAIR Block-Off Cap (Black) Installation Instructions for ZX-10R (06-07)

The PAIR block-off cap is used to block off emissions (PAIR) to help prevent 'deceleration pop' and also prevents ram-air pressure loss from the air box after blocking the PAIR. It will be necessary to lift the air box up to access the PAIR valve hose. Refer to a factory service manual for more detailed information.

1. Lift and prop gas tank.
2. PAIR valve hose location is under the air box on the air box holder. See figure 1.
3. Remove air box cover, air filter, and velocity stacks from inside air box. *Be very careful to not drop anything into the throttle bodies, debris can destroy your engine. Cover throttle bodies with clean rags.* Disconnect sensor from the rear of air box. See figure 2.
4. Remove hoses from rear of air box. See figure 3.
5. Disconnect air ducts from front of air box and rotate the air box counterclockwise to remove.
6. Remove PAIR valve hose from port and press the CAP one inch into the hose. Wet cap a little with Windex and use a 3/8" drive extension to push in. See figure 4, 5, & 6.
7. Push hose onto port of air box. See figure 7.
8. Reinstall air box and components from steps 3 to 5.

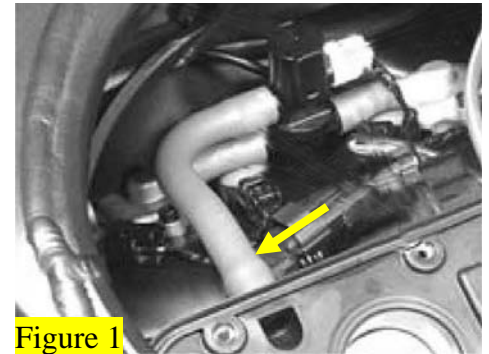


Figure 1

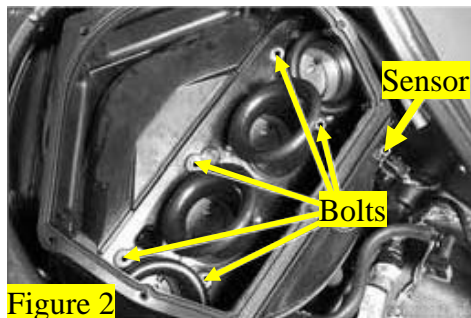


Figure 2

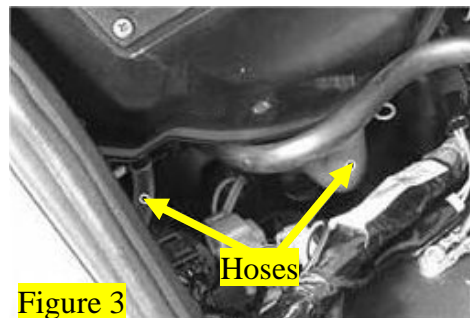


Figure 3

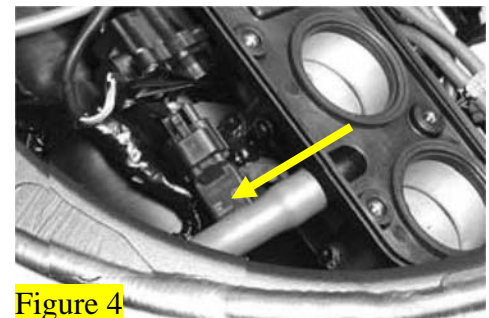


Figure 4



Figure 5



Figure 6

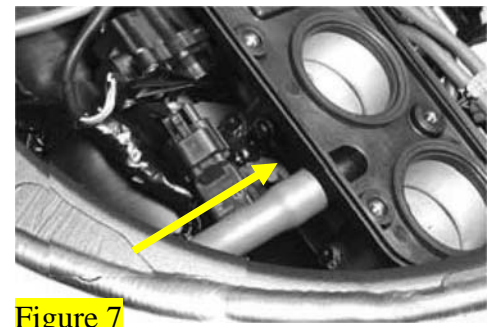


Figure 7

Brock's Performance Products are designed for Closed-Course Racetrack use ONLY

For more information go to www.BrocksPerformance.com, **click:** Installation Instructions

email: Advice@BrocksPerformance.com, or call the office at 937-912-0054

Brock's Performance Products policies and warranty information: www.BrocksPerformance.com, **click:** Policies